

SPECIFICATION SHEET

# A2450S

4" Series – Classic/Evolution

Low Profile Shower Trim

Project \_\_\_\_\_



Notes \_\_\_\_\_

Fixture Type \_\_\_\_\_

Date \_\_\_\_\_



A2450S-05 (illustrated)  
(Lamp not included)

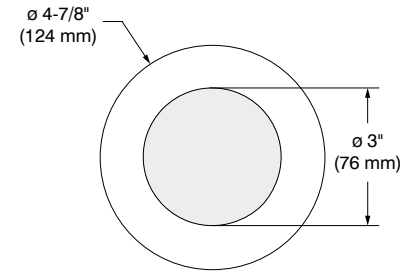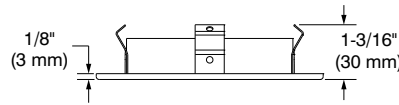

## SPECIFICATIONS

TRIM	Die-formed steel.
<i>Options in red may generate a longer production lead time</i>	<p><b>Different finishes available:</b></p> <p><b>Powder coat painted (Standard)</b> White (-01), Black (-02), Architectural Bronze (-05), Antique Cooper (-06), Matte White (-11), Matte Black (-22) and Polar Grey (-25)</p> <p><b>Plated (Premium)</b> 24K Gold Plated (-03), Chrome (-04), Brushed Chrome (-04BR), Brushed Nickel (-12BR) and Satin Nickel (-13)</p>
LAMPS (not included)	<p><b>PAR20 LED 10W MAX</b></p> <p>If you want to use the dimming option, please refer regularly to the lamp manufacturer compatibility list.</p> <p><b>Using LED lamps in shower trims and an Air Tight housing may result in its lifespan decrease.</b> <b>Contraste cannot be held responsible for LED lamps lifespan loss when used in totally enclosed spaces.</b></p>
LENS	<b>Standard: Frosted</b>
CEILING CUTOUT	<b>ø 4-1/4" (108 mm)</b>
ACCESSORIES	Goof rings (see ordering code)
CERTIFICATION	cULus for <b>wet locations</b>
WARRANTY	1 year limited warranty on components against manufacturing defects

SPECIFICATION SHEET

# A2450S

4" Series – Classic/Evolution

## Low Profile Shower Trim




SPECIFICATIONS (CONT'D)

COMPATIBLES HOUSINGS

	Remodel Housing 	New Construction Housing 	Insulated Housing 
LED 10W	IC / Air Tight  RE40PAR-10W	IC / Air Tight  NW40PAR-10W	IC / Air Tight  IC40PAR-10W

CODIFICATION EXAMPLE



*Options in red may generate a longer production lead time.*

ORDERING CODES

MODEL	TRIM FINISHES
<b>A2450S</b>	
<b>A2450S</b>	<b>POWDER COAT PAINTED (Standard)</b>
-01	White
-02	Black
-11	Matte White
-22	Matte Black
-25	Polar Grey
-05	Architectural Bronze
-06	Antique Copper
	<b>PLATED (Premium)</b>
-04BR	Brushed Chrome
-12BR	Brushed Nickel
-03	24K Gold Plated
-04	Chrome
-13	Satin Nickel

GOOF RINGS

Goof rings correct the openings too large or damaged ceiling cutout.

All goof rings are available in all Contraste finishes. Add finish color code at the end of the goof rings code.  
Ex.: RON2000-06

**Code: RON2000**

Outside diameter: ø 6-1/8" (156 mm)      Inside diameter: ø 4-1/8" (105 mm)

