


SPECIFICATION SHEET

3 1/2" 3000 SERIES

ISMR3000E20

INSULATED CEILING HOUSING WITH ELECTRONIC CONVERTER

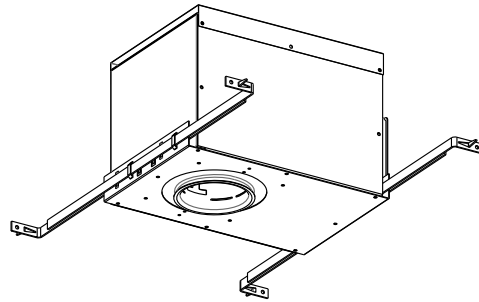

YES

Damp Location



MR16 20W MAX

MR16



ELECTRONIC CONVERTER



Voltage

120 VOLTS (CAN & USA)



Thermal Protector

T°C 95°C No 026



OD Cut

3 3/4" (95mm)





E174023



Dimensions

Overall Dimensions :
Length : 15 5/16" (389mm)
Width : 8 1/4" (210mm)
Height : 7 7/8" (200mm)

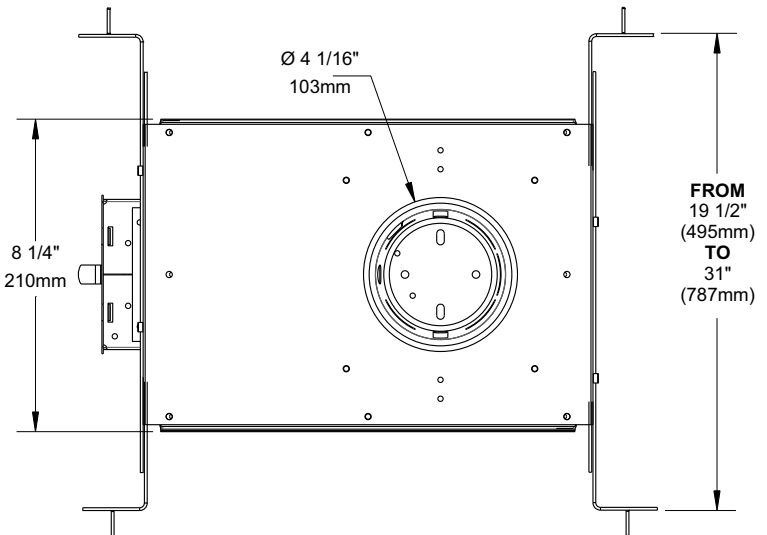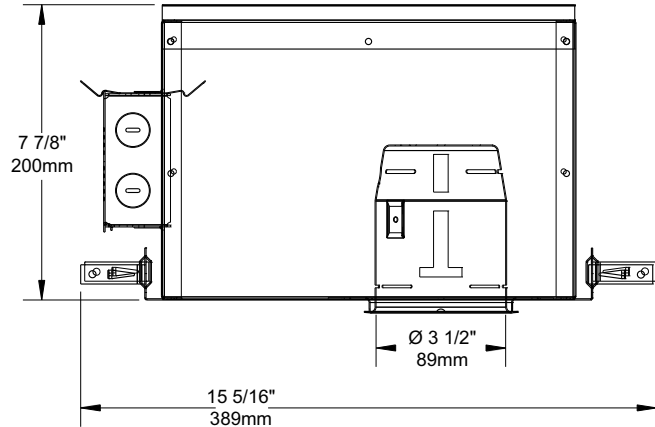

COMPATIBLE TRIMS

MR16 20W

R3151	S3145D	T3000	T3250	T3500D
R3151W	S3151	T3100	T3260	T3500W
R3152	S3400	T3125	T3300	T3600
R3601	S3400D	T3145	T3400	T3602
R3601W	S3450	T3145D	T3400D	T3650
R3602	S3450D	T3145W	T3400W	T3652
R3651	S3500	T3152	T3450	T3700
R3651W	S3500D	T3165	T3450D	T3800
R3652	S3601	T3185	T3450W	T3850
S3145	S3651	T3200	T3500	T3900

OPTIONS

CHICAGO PLENUM

Requirement for all lighting fixtures installed in the city of Chicago. Complies for ceiling air Plenum.
Code : ISMR3000E20P

TITLE 24

Complies with California State Title 24 Energy Code.
Code : ISMR3000E20W

TECHNICAL SPECIFICATIONS

0,021" (0,53mm) thickness Galvanized Steel.
Below-ceiling accessible.
Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
Takes up to 7/8" thick ceiling.
Perfect fit into ceiling.
No light leak.



Your representative : _____

Your project : _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN, G6Z1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

JUNE 2010