

# NWA2R - NWA2S

2-1/2" Series - Ardito


New Construction Housing

Project \_\_\_\_\_


Notes \_\_\_\_\_

Fixture type \_\_\_\_\_





Date \_\_\_\_\_

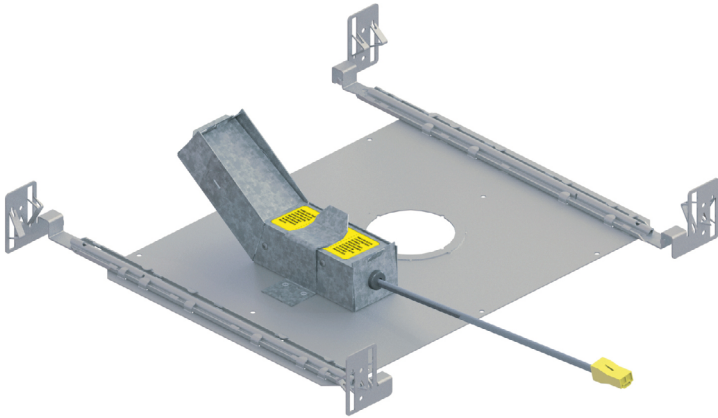

NWA2R (illustrated)

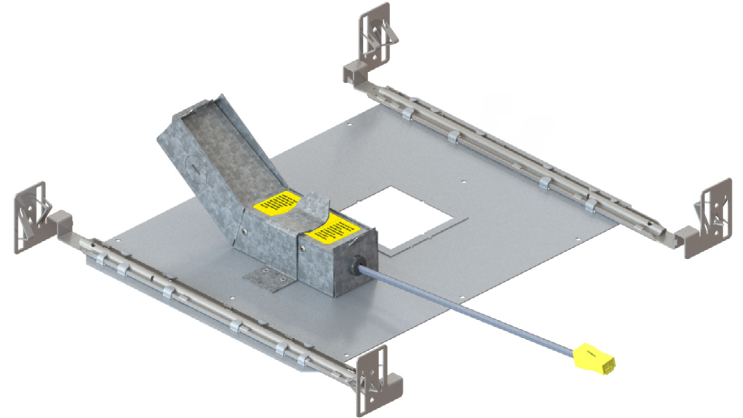

NWA2S (illustrated)

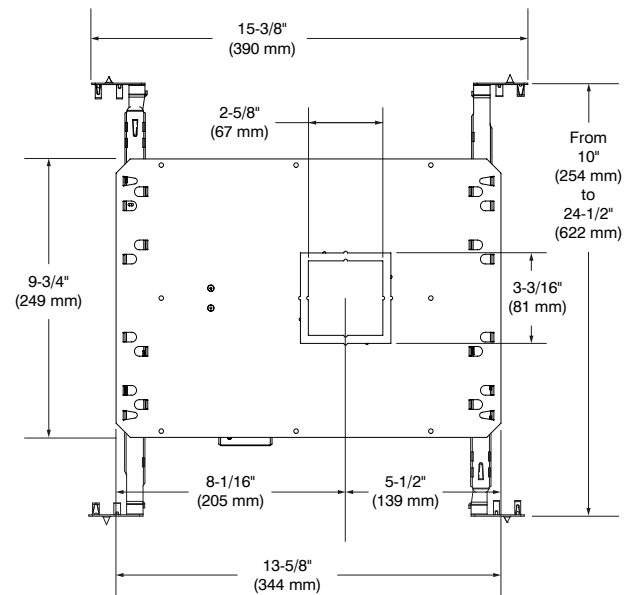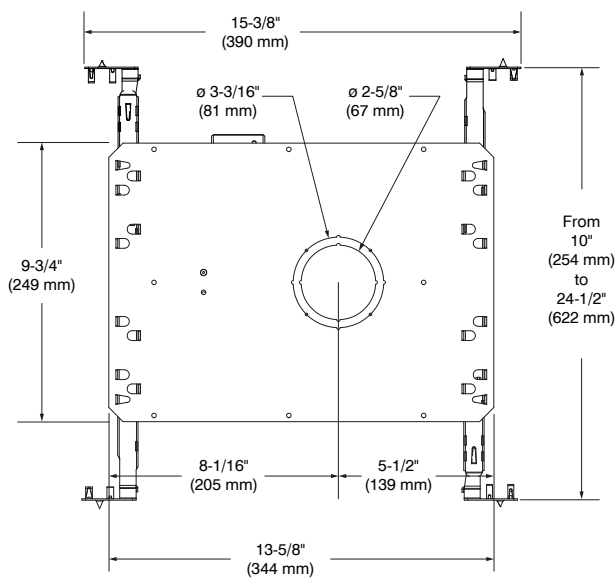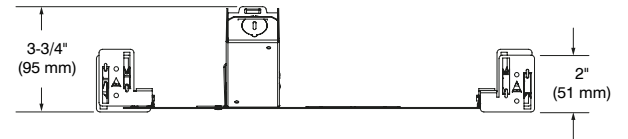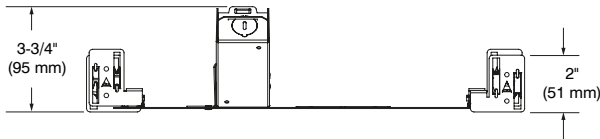

# CONTRASTE

2019-07  
Revision 1

PRINTED IN CANADA

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624  
Fax.: 1-877-839-7057  
contrastelighting.com  
info@contrastelighting.com

© 2019 Contraste Lighting M.L. Inc.  
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# NWA2R - NWA2S

**2-1/2" Series - Ardito****New Construction Housing**

## SPECIFICATIONS

|                      |   |
|----------------------|---|
| HOUSING DETAILS      | Galvanized steel housing.<br>Junction box fixed on a mounting plate by a blade spring. Can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires).<br>Below-ceiling accessible.  |
| MOUNTING AND SUPPORT | <p><b>Flanged Trim Round Cutout diameter: <math>\varnothing</math> 2-5/8" (67 mm)</b><br/> <b>Flanged Trim Square Cutout: 2-5/8" (67 mm) x 2-5/8" (67 mm)</b></p> <p><b>Flangeless Trim Round Cutout diameter: <math>\varnothing</math> 3-3/16" (81 mm)</b> <input type="checkbox"/><br/> <b>Flangeless Trim Square Cutout: 3-3/16" (81 mm) x 3-3/16" (81 mm)</b> <input type="checkbox"/> (Mud-in-plate sold separately)</p> <p><b>Optional:</b> Reusable steel cutout template for square trim (<b>TEMP-SQ</b>)</p> <p>Consult trims specification sheets for plenum space requirements.<br/> Can fit in ceiling from 1/2" (12 mm) to 1-3/8" (35 mm) thick.<br/> Insulation material must be kept at least 3" (76 mm) away from the fixture.<br/> Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceiling structures.</p> |
| PERFORMANCE          | <p><b>Performance 1:</b> Up to 1,375 lumens (14W)      Warm Dimming (WD): Up to 775 lumens (14W)<br/> Consult trims specification sheets for complete details.</p>  |
| POWER                | 120V - 277V   |
| DIMMING              | <p>2 types of dimming offered all within the same unit:</p> <ul style="list-style-type: none"> <li>• Electronic Low Voltage (ELV) (120V only)</li> <li>• 0-10V (120V/277V)</li> </ul> <p>Due to constant evolution of dimmers we must test them regularly.<br/> We invite you to frequently consult our Web site to find our suggested compatible dimmers list: <a href="http://www.contrastlighting.com">www.contrastlighting.com</a></p>  |
| COMPATIBLE TRIMS     | <p><b>Performance 1 (14W)</b></p> <p>A2RAF    A2RFR    A2SAR    A2SSF<br/> A2RAR    A2RSF    A2SFR</p>  |
| CERTIFICATION        | cULus <b>E343977</b> for damp and wet locations with shower trims   |
| WARRANTY             | 5 years on LED driver.  |

# CONTRASTE

2019-07  
Revision 1

PRINTED IN CANADA

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624  
Fax.: 1-877-839-7057  
contrastlighting.com  
info@contrastlighting.com

© 2019 Contraste Lighting M.L. Inc.  
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.


# NWA2R - NWA2S

2-1/2" Series - Ardito

New Construction Housing



CODIFICATION EXAMPLE

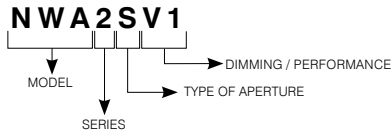

ORDERING CODES

| MODEL                                      | SERIES                 | TYPE OF APERTURE                  | DIMMING / PERFORMANCE  |
|--|------------------------|-----------------------------------|--|
| <b>NWA</b>                                 | <b>2</b>               |                                   | <b>V1</b>  |
| <b>NWA</b> Ardito New Construction Housing | <b>2</b> 2-1/2" Series | <b>R</b> Round<br><b>S</b> Square | <b>V1</b> 14W (up to 1,375 lumens)<br><b>Warm Dimming (WD)</b> — 14W (up to 775 lumens)<br>120V/277V<br>0-10V<br>ELV (120V only) |

MUD-IN-PLATE OPTION

Required with the use of flangeless trims.  
(see installation instructions sheet for more details)

**ROUND**


**ø 3-3/16" (81 mm)**

**Code: MIPA2R**

**SQUARE**

**3-3/16" (81 mm) x 3-3/16" (81 mm)**

**Code: MIPA2S**

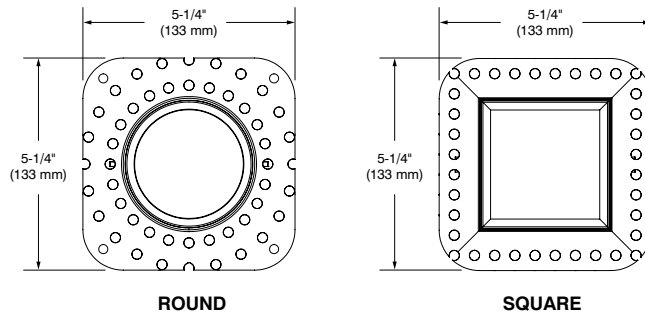

REUSABLE TEMPLATE OPTION

Reusable steel cutout template for square trim

**Code: TEMP-SQ**

