

SPECIFICATION SHEET


S3151**3-1/2" Series – Classic/Evolution****Low Profile Square Shower Trim
with Square Pinhole Opening**

Project _____

Notes _____

Fixture Type _____

Date _____

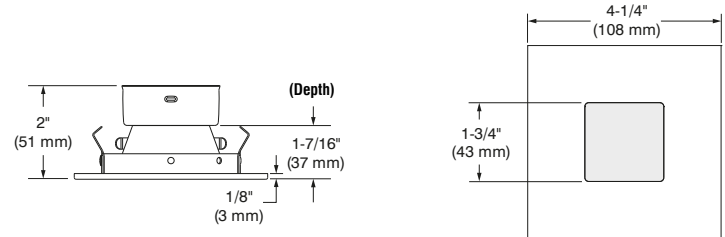S3151-05 (illustrated)
(Lamp not included)

SPECIFICATIONS

TRIM	Die-formed steel.
<i>Options in red may generate a longer production lead time</i>	<p>Different finishes available:</p> <p>Powder coat painted (Standard) White (-01), Black (-02), Architectural Bronze (-05), Antique Cooper (-06), Matte White (-11), Matte Black (-22) and Polar Grey (-25)</p> <p>Plated (Premium) 24K Gold Plated (-03), Chrome (-04), Brushed Chrome (-04BR), Brushed Nickel (-12BR) and Satin Nickel (-13)</p>

LAMPS (not included)	<p>GU10 LED 10W MAX MR16 GU5.3 20W MAX (Remodel and Insulated housing) - (protected lamps only)</p> <p>MR16 LED GU5.3 7W MAX MR16 GU5.3 50W MAX (New Construction housing) - (protected lamps only)</p>
-------------------------	---

If you want to use the dimming option and you use a LED lamp, please refer regularly to the lamp manufacturer compatibility list.

For MR16 LED lamp usage, please refer to the selected housing specification sheet for details on transformer models (see compatible housing list below).

**Using LED lamps in shower trims and an Air Tight housing may result in its lifespan decrease.
Contraste cannot be held responsible for LED lamps lifespan loss when used in totally enclosed spaces.**

CEILING CUTOUT	ø 3-5/8" (92 mm)
CERTIFICATION	cULus for wet locations (for LED and halogens lamps)
WARRANTY	1 year limited warranty on components against manufacturing defects

CONTRASTE

2021-01

PRINTED IN CANADA

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2021 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SPECIFICATION SHEET

S3151

3-1/2" Series – Classic/Evolution




Low Profile Square Shower Trim with Square Pinhole Opening



SPECIFICATIONS (CONT'D)

REFLECTORS	<p>STANDARD: Anodized Aluminum</p> <p>OPTIONS:</p> <p>Specular</p> <p>Black (BK)</p> <p>Clear (CL)</p> <p>Paint</p> <p>White (-01)</p> <p>Black (-02)</p> <p>Matte White (-11)</p>
LENSES	<p>STANDARD: Frosted Lens</p> <p>Available: Clear lens (C)</p> <p>To order, place the lens code after the trim code.</p> <p>Ex. : S3151C-01</p>
ACCESSORIES	<p>Goof Rings (see ordering code)</p>

COMPATIBLE HOUSINGS

	Remodel Housing 	New Construction Housing 	Insulated Housing 
LED 10W	<p>IC / Air Tight</p> <p>RE35GU10-10W RE35MR16-120-10W RE35MR16-277-10W</p>	<p>IC / Air Tight</p> <p>NW35GU10-10W NW35MR16-120-10W NW35MR16-277-10W</p>	<p>IC / Air Tight</p> <p>IC35GU10-10W IC35MR16-120-10W IC35MR16-277-10W</p>
HALOGENS 37W/50W	<p>Non-IC / Non Air Tight</p> <p>RE35MR16-120-37W RE35MR16-277-37W</p>	<p>Non-IC / Non Air Tight</p> <p>NW35MR16-120-50W NW35MR16-277-50W NW35MR16-120D-50W NW35MR16-277D-50W</p>	<p>IC / Non Air Tight</p> <p>IC35MR16-120-37W IC35MR16-277-37W IC35MR16-120D-37W IC35MR16-277D-37W</p>

SPECIFICATION SHEET


S3151

3-1/2" Series – Classic/Evolution

Low Profile Square Shower Trim with Square Pinhole Opening



CODIFICATION EXAMPLE



ORDERING CODES

MODEL	LENSES	TRIM FINISHES	REFLECTORS
S3151			
S3151	Standard: Frosted	POWDER COAT PAINTED (Standard)	ANODIZED
C	Clear	-01 White	Standard: Anodized Aluminum
		-02 Black	
		-11 Matte White	SPECULAR
		-22 Matte Black	CL Clear
		-25 Polar Grey	BK Black
		-05 Architectural Bronze	
		-06 Antique Copper	PAINT
		PLATED (Premium)	-01 White
		-04BR Brushed Chrome	-02 Black
		-12BR Brushed Nickel	-11 Matte White
		-03 24K Gold Plated	
		-04 Chrome	
		-13 Satin Nickel	

GOOF RINGS

All goof rings are available in all Contraste finishes. Add finish color code at the end of the goof rings code.

Ex.: RON3100-06

Code: RON3100

Outside dimensions: 5" (127 mm) x 5" (127 mm)
Inside diameter: ø 3-5/8" (92 mm)

